

## GRUPPO INCASSO PLUS

### Version

Plus - Built-in 105 cm - Black -  
800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122367163



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

### OPTIONAL ACCESSORIES

#### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

#### KACL.782#49F

Slim motor 800 m<sup>3</sup>/h

#### KACL.786#41F

Outdoor extractor fan 1000

m<sup>3</sup>/h

#### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

#### KACL.797#4AF

Remote under-roof motor 1300

m<sup>3</sup>/h

#### KACL.798#41F

Remote under-roof motor 950

m<sup>3</sup>/h

#### 103050091

Round charcoal filter Ø170 mm -

Type 6

#### 105080053

Remote control

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

105 cm

### Finishing

Brushless

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x3 W - 2700 K / 5600 K

### Minimum distance

Gas hob: 62 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

18 kg

### Net weight

15 kg

### Volumes

0.16 m<sup>3</sup>

### Packaging size

Length

1185 mm

Height

345 mm

Depth

385 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage


220-240V

### Frequency

50-60Hz

### ENERGY CLASS

B



## GRUPPO INCASSO PLUS

### Version

Plus - Built-in 105 cm - Black -  
800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122367163

## ENERGY LABEL

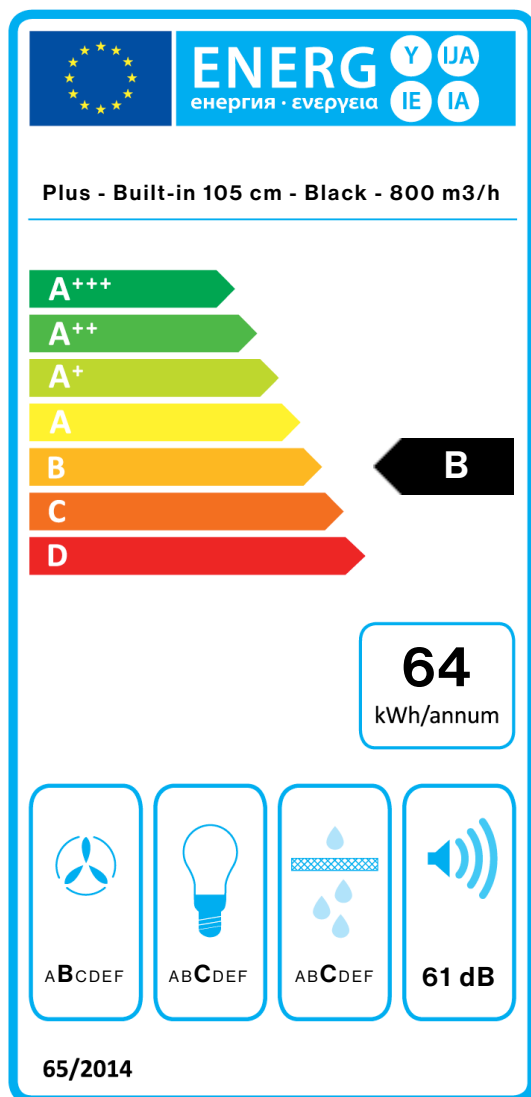

PF		
S	Falmec Spa	
M	Plus - Built-in 105 cm - Black - 800 m <sup>3</sup> /h	
AEC	63,5	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	16,7	
LEC	C	
GFE	80,0	
GFEC	C	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	670,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1,1	
EEL	63,7	
Qbep	333,0	m <sup>3</sup> /h
Pbep	407	Pa
Qboost	670,0	m <sup>3</sup> /h
Wbep	147,7	W
WL	5,80	W
Emiddle	97	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.