

GRUPPO INCASSO PLUS

Version

Plus - Built-in 50 cm - Inox - 800 m3/h

Collection

Design

EAN code

8034122367187



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Optional charcoal filter
Optional remote control
Dimmable led lighting
Dynamic LED Light (2700K - 5600K)
Dialogue system with auto mode

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h
Brushless

KACL.782#49F
Slim motor 800 m3/h

KACL.786#41F
Outdoor extractor fan 1000 m3/h

KACL.796#4AF
Outdoor extractor fan 1500 m3/h

KACL.797#4AF
Remote under-roof motor 1300 m3/h

KACL.798#41F
Remote under-roof motor 950 m3/h

103050091
Round charcoal filter Ø170 mm - Type 6

105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in

Dimensions
50 cm

Finishing
Scotch brite stainless steel (AISI 430)

Motor
800 m³/h

Type of control
Electronic control

Speed settings
4

Lighting
Led 2x1,2 W - 2700 K / 5600 K

Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
9.5 kg

Net weight
7.6 kg

Volumes
0.09 m³

Packaging size
Length
610 mm
Height
380 mm
Depth
375 mm


CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

Voltage
220-240V

Frequency
50-60Hz

ENERGY CLASS
B



GRUPPO INCASSO PLUS

Version

Plus - Built-in 50 cm - Inox -
800 m³/h


Collection

Design

EAN code

8034122367187

ENERGY LABEL

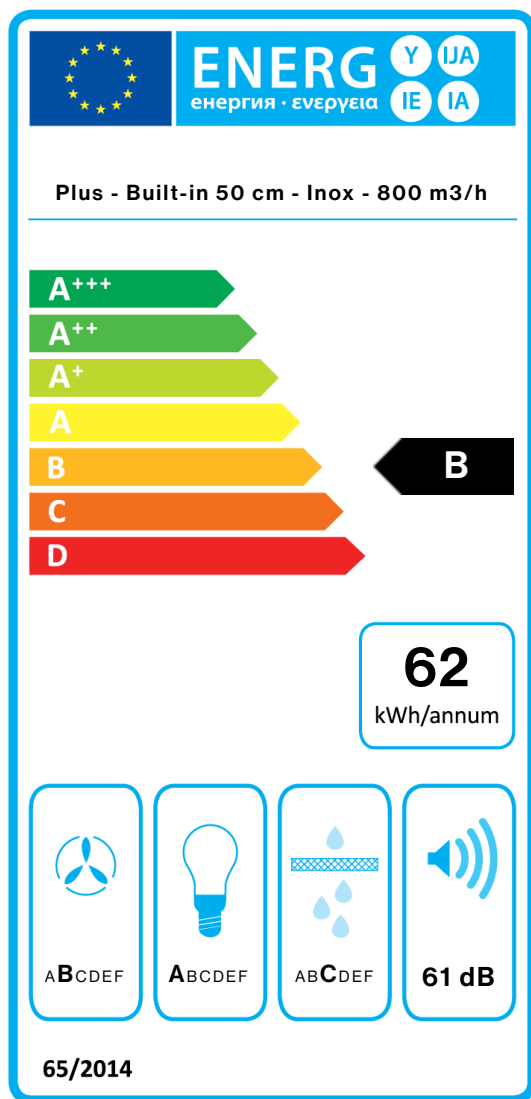

PF		
S	Falmec Spa	
M	Plus - Built-in 50 cm - Inox - 800 m ³ /h	
AEC	61,9	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	1.1	
EEL	62,8	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	3,50	W
Emiddle	115	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.