

## VIRGOLA TOUCH

### Version

Touch - Built-in 75 cm - Inox -  
800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122367453



## FEATURES

**Touch control**

**Metallic grease filter,  
removable and washable**

**Optional combined regenerable  
Carbon.Zeo filter**

**Dynamic LED Light (2700K -  
5600K)**

## OPTIONAL ACCESSORIES

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### KACL.782#49F

Slim motor 800 m<sup>3</sup>/h

### KACL.786#41F

Outdoor extractor fan 1000  
m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300  
m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950  
m<sup>3</sup>/h

### KACL.961

Charcoal and Zeolite filter

### KCVJN.00#3

Telescopic chimney h 185 + h 185

### KCVJN.01#3

Kit Chimney Virgola-Move H120

Stainless Steel

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

75 cm

### Finishing

Scotch brite stainless steel

### Motor

800 m<sup>3</sup>/h

### Type of control

Touch control

### Speed settings

4

### Lighting

Strip Led 4,6 W - 2700 K / 5600

K

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

15.3 kg

### Net weight

11.9 kg

### Volumes

0.19 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

410 mm

Depth

465 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage



220-240V

### Frequency

50-60Hz

### ENERGY CLASS

A



## VIRGOLA TOUCH

### Version

Touch - Built-in 75 cm - Inox -  
800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122367453

## ENERGY LABEL

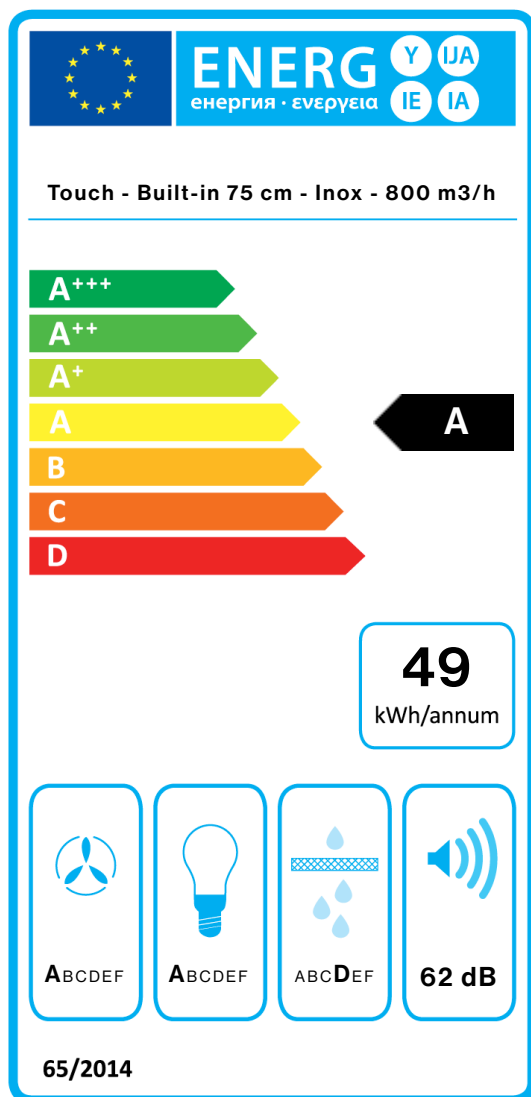

PF		
S	Falmec Spa	
M	Touch - Built-in 75 cm - Inox - 800 m <sup>3</sup> /h	
AEC	48,7	kWh/a
EEC	A	
FDE	29,9	
FDEC	A	
LE	29,4	
LEC	A	
GFE	70,0	
GFEC	D	
Qmin	237,0	m <sup>3</sup> /h
Qmax	440,0	m <sup>3</sup> /h
Qboost	661,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	71	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEL	52,0	
Qbep	400,0	m <sup>3</sup> /h
Pbep	371	Pa
Qboost	661,0	m <sup>3</sup> /h
Wbep	138,0	W
WL	4,60	W
Emiddle	135	lex
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.