


Version Worktop - 90 cm - Black - 800 m³/h
Collection Design

TECHNICAL FEATURES

Materials/Finishes Smoked tempered glass
Materials/Finishes Aluminium finishing black matt
Features Up/Down lift system with height adjustment
 Motor position adjustment system to optimise cabinet space
 Grease and odour filter basket with liquid collection tray
Control Dialogue system
 Touch control
 Remote control (optional)
Function Extracting/Filtering
Lighting Dynamic Light (2700K - 5600K)
 Strip LED 7 W - 2700 K / 5600 K
Filters Metallic grease filter, removable and washable
 Carbon.Zeo Microtech regenerable filter (optional)
Motor Brushless Motor
Dimensions 90 cm

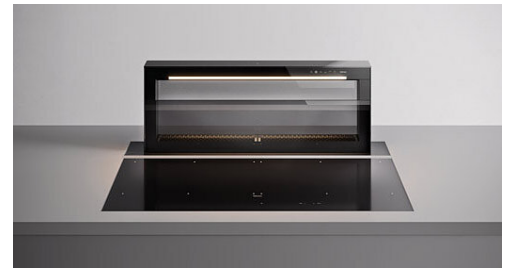

Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS




Maximum consumption 180 W
Voltage/Frequency 220-240V 50-60Hz


MOTOR

Motor Brushless Motor 800 m³/h
Maximum capacity 665 m³/h I.E.C.61591
Maximum sound level 64 dB (A)re1pW I.E.C. 60704-2-13
Energy class A++

WEIGHTS AND VOLUMES

Gross weight 38.8 kg
Net weight 31.7 kg
Volume 0.37 m³
Packaging dimensions L 1070 x H 402 x P 870 mm

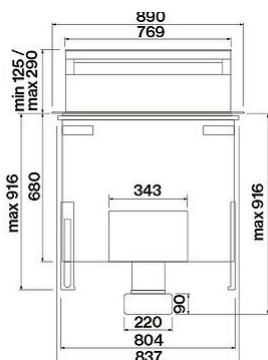

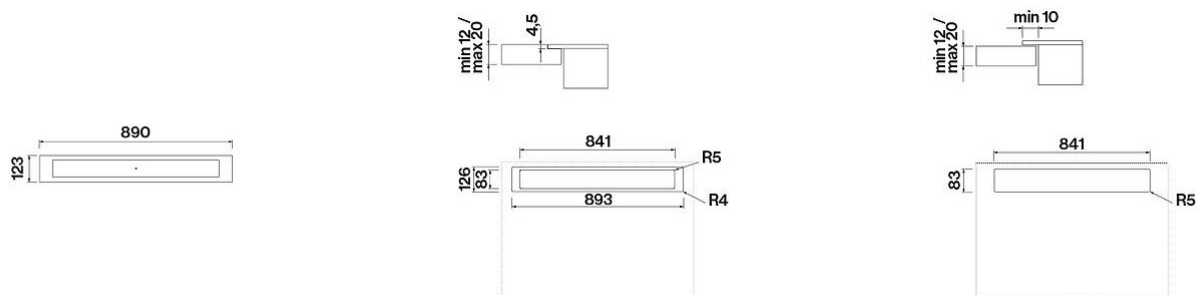

Optional accessories

Code	Description
KACL.1042	Carbon.Zeo Microtech regenerable filter (2x)
105080061	Remote control (Level, Levante)

FLOW RATE / PRESSURE

PF		
S		
M	Worktop - 90 cm - Black - 800 m3/h	
AEC	28.10	kWh/a
EEC	A++	
FDE	40.30	
FDEC	A	
LE	0.30	
LEC	G	
GFE	87	
GFEC	B	
Qmin	435	m ³ /h
Qmax	605	m ³ /h
Qboost	665	m ³ /h
SPEmin	56	dBa
SPEmax	64	dBa
SPEboost	65	dBa
PO		
PS	0.00	W
PI		
F	0.00	
EEL	33.00	
Qbep	414	m ³ /h
Pbep	413	Pa
Qboost	665	m ³ /h
Wbep	119	W
WL	9.00	W
Emiddle	3	lux
Lwa-SPEmax	64	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.