

<b>Version</b>	Body hood - Worktop - 90 cm - Black - 800 m <sup>3</sup> /h
<b>Design</b>	Francesco Lucchese
<b>Collection</b>	Elements

**TECHNICAL FEATURES**

<b>Materials/Finishes</b>	Aluminium finishing black matt
<b>Materials/Finishes</b>	Smoked tempered glass
<b>Features</b>	Modular system Concealed suction with opening panel Motor position adjustment system to optimise cabinet space Grease and odour filter basket with liquid collection tray
<b>Control</b>	Touch control Remote control (optional) Dialogue system
<b>Function</b>	Extracting/Filtering
<b>Lighting</b>	Dynamic Light (2700K - 5600K) Dimmable lighting Strip LED - 2700 K / 5600 K
<b>Filters</b>	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)
<b>Motor</b>	Brushless Motor
<b>Dimensions</b>	90 cm



Photograph is for information purposes only. May not correspond to the selected version

**CONNECTION AND CONSUMPTION FUNCTIONS**












<b>Maximum consumption</b>	180 W
<b>Voltage/Frequency</b>	220-240V 50-60Hz
<b>Plug</b>	Shuko

**MOTOR**

<b>Motor</b>	Brushless Motor 800 m <sup>3</sup> /h
<b>Maximum capacity</b>	670 m <sup>3</sup> /h I.E.C.61591
<b>Maximum sound level</b>	64 dB (A)re1pW I.E.C. 60704-2-13
<b>Energy class</b>	A+++

**WEIGHTS AND VOLUMES**

<b>Gross weight</b>	28 kg
<b>Net weight</b>	24 kg
<b>Volume</b>	0 m <sup>3</sup>
<b>Packaging dimensions</b>	L 0 x H 2 x P 0 mm

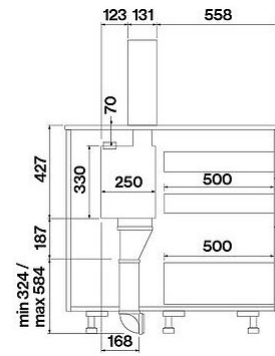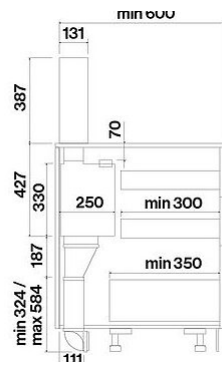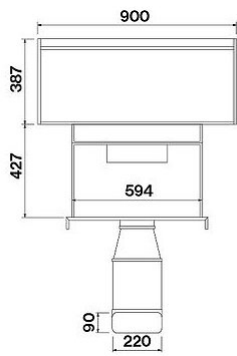

**Optional accessories**

Code	Description
KACL.1063#NF	Glass holder for 4 glasses - Black
KACL.1062#NF	Kitchen roll holder - Black

**Optional accessories**

<i>Code</i>	<i>Description</i>
KACL.1054	Carbon.Zeo Microtech regenerable filter (2x)
105080053	Remote control

**FLOW RATE / PRESSURE**

PF		
S	Francesco Lucchese	
M	Body hood - Worktop - 90 cm - Black - 800 m <sup>3</sup> /h	
AEC	24.5	kWh/a
EEC	A+++	
FDE	43.4	
FDEC	A	
LE	10	
LEC	E	
GFE	87	
GFEC	B	
Qmin	440	m <sup>3</sup> /h
Qmax	620	m <sup>3</sup> /h
Qboost	670	m <sup>3</sup> /h
SPEmin	56	dBa
SPEmax	64	dBa
SPEboost	65	dBa
PO		
PS	0	W
PI		
F	0	
EEL	29	
Qbep	384	m <sup>3</sup> /h
Pbep	460	Pa
Qboost	670	m <sup>3</sup> /h
Wbep	113	W
WL	11	W
Emiddle	110	lux
Lwa-SPEmax	64	dBa

PF\_Scheda prodotto conforme a 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions (in dB) at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps).

PI\_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.